LINDY PRODUCT SPECIFICATION (1 OF 1)

Weight with	Weight without	Overall Length	LINDY Polybag	Product Number
0.04kg	0.03kg	0.3m	P12	**30859**
0.07kg	0.06kg	1m	P02	**30860**
0.13kg	0.12kg	2m	P02	**30861**
0.18kg	0.17kg	3m	P02	**30862**
0.27kg	0.25kg	4.5m	P03	**30863**
0.42kg	0.40kg	7.5m	P03	**30864**
0.55kg	0.53kg	10m	P03	**30865**
0.89kg	0.87kg	15m	P3.5	**30866**
1.18kg	1.16kg	20m	P3.5	**30867**
1.47kg	1.45kg	25m	P3.5	**30868**

RoHS compliant

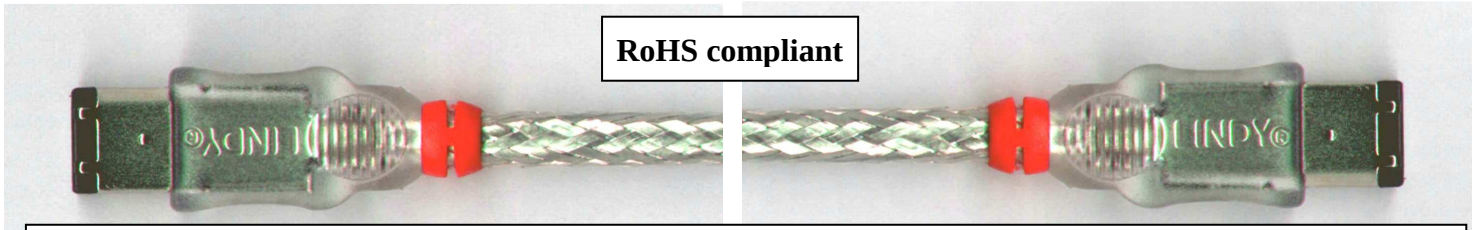

Cable Printing: (UL-Logo) AWM ******** SUNF PU STYLE 20276 80°C 30V VW-1 IEEE 1394 CABLE

Connector: A
IEEE 1394 6 Pin Plug

Connector: B
IEEE 1394 6 Pin Plug

A	B	Function
1	1	
2	2	
3	5	
4	6	
5	3	
6	4	
Can+2	Can+2	Braid/Shield

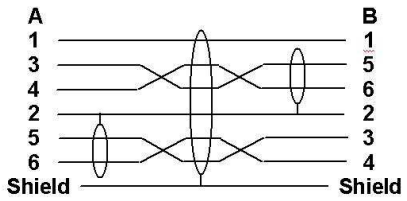

IEEE 1394 Firewire Pin Functions

6 Way IEEE 1394 Connector

1 VP
2 VG
3 TBP
4 TPB
5 TBA
6 TPA

Description: **Transparent IEEE 1394 Firewire Cable 6 Pin to 6 Pin**

- Raw Cable Material from SUNF PU
- Cable Type: UL20276 AWG28-(1TP+A+B)*2+AWG22-2C)+MYLAR+A+B-TT02-6.0.
- With overall polyester tape wrapped and aluminium/polyester shield plus 90% minimum coverage tinned copper braid shield (16/10/0.10T)
- LINDY design mould with Gold plated contacts

Packaging: LINDY Polybag as above with barcode label & minifolder

Alterations	Issue	Date	BY	GB	DE
Added 15m, 20m, 25m	6	06.07.10	oH	AI	
Weight and packaging amended	7	26.01.11	CS	oH	

Drawn By: G.S. 20.02.03

All connectors viewed from front

The following tolerances apply to overall dimensions -0% +10%

© LINDY Electronics Ltd.,